

# Technical Information

## Main unit

### Processor

A PowerPC™ 603e processor with the following features:

- 180 megahertz (MHz) or 200 MHz processor speed (You can tell by the second part of the number of your computer model. For example, if your computer model is a Power Macintosh 5400/180, the speed is 180 MHz.)
- built-in floating point unit (FPU)
- 40 MHz system bus
- 32 kilobytes (K) internal cache (16K data, 16K instruction)

### Memory

- A minimum of 16 megabytes (MB) of dynamic random-access memory (DRAM), expandable to a maximum of 136 MB in two sockets. The main logic board has 8 MB of DRAM soldered to it, and additional memory is installed in the memory sockets. DRAM DIMMs installed later should be 64-bit wide, 168-pin 5-volt (V) Extended Data Output (EDO) DIMMs, with 60-nanosecond (ns) RAM access time or faster and a 1K or 2K refresh count. The Single Inline Memory Modules (SIMMs) from older Macintosh computers are not compatible with your computer and cannot be used. 3.3-V DIMMs and DIMMs that require a 4K refresh count also cannot be used.
- 1 MB of built-in video RAM
- 4 MB of read-only memory (ROM)
- 8K of nonvolatile parameter memory
- One socket for an optional High Performance Module (Level 2 cache). The Power Macintosh 5400/200 comes with a High Performance Module already installed.

### Internal disk drives

The following drives were installed in your computer at the factory:

- Apple SuperDrive 1.4 MB high-density floppy disk drive
- Apple ATA (AT Attachment) hard disk drive, also known as an Integrated Device Electronics (IDE) hard disk drive
- Tray-loading CD-ROM drive (5.25-inch, 1/2-height).

### Video

#### Graphic modes supported

Your Power Macintosh 5400 series computer can display the graphic modes listed in the following table. In addition, your computer can display video input in some modes.

Resolution	Color depth	Vertical scan rate	Video input supported
640 x 480	16-bit	60 Hz and 67 Hz	yes
800 x 600	16-bit	60 Hz	yes, 8-bit or less color depth
800 x 600	8-bit	72 Hz	no
832 x 624	8-bit	75 Hz	yes



## Video output

With the optional Apple External Video Connector kit, your computer can be connected to a video presentation system or a liquid crystal display (LCD) panel. Your Macintosh can also support video mirroring (connecting a second monitor for display purposes) on the following monitors at the resolutions indicated with an X:

	640 x 480 at		800 x 600 at		832 x 624 at
	60 Hz	67 Hz	60 Hz	72 Hz	75 Hz
Apple Basic Color Monitor (14")	x				
Apple Color Plus 14" Display		x			
Apple High-Resolution RGB Monitor (13")		x			
Apple Multiple Scan 14 Display	x	x		x	x
Apple Multiple Scan 15 Display	x	x	x	x	x
Apple Multiple Scan 17 Display	x	x	x	x	x
Apple Multiple Scan 20 Display	x	x	x	x	x
Macintosh Color Display (14")		x			
SVGA monitors*	x		x	x	
VGA monitors*	x				

\*A plug adapter may be required to connect an SVGA or VGA monitor.

## Video input

With the optional Apple Video System video input card, you can view and record video from a video camera, VCR, or other video equipment. (If the optional Apple TV/FM Radio System is also installed, you can record video from broadcast or cable television.)

- Format: composite or S-video
- Transmission Format: industry standard NTSC/PAL/SECAM
- Polarity: sync negative
- Level: 0.8 volts peak-to-peak (V<sub>pp</sub>) minimum to 2.0 V<sub>pp</sub> maximum ("S" chroma level 1.4 V<sub>pp</sub> maximum)
- Impedance: 75 ohms ( $\Omega$ ) internally terminated
- DC offset: +/-1.0 volts (V) maximum

## Sound

- 16-bit stereo input
- 16-bit stereo output featuring **SRS (●)** 3D Surround Sound technology
- Sample rates of 11.025, 22.05, and 44.1 kilohertz (kHz)
- Sound input connector line level: 2 V<sub>pp</sub> maximum, into 10 kilohms (kΩ) impedance
- Sound output connector line level: 2 V<sub>pp</sub> maximum, into 32 Ω impedance
- Signal-to-noise ratio (SNR): 75 decibels (dB) minimum, 80 dB typical (A-weighted, 2 V<sub>pp</sub> output, 1 kHz, digital record and playback, sound input port to sound output port, with **SRS (●)** 3D Surround Sound turned off)
- Frequency response: 20 Hz–18 kHz (–3 dB relative to 1 kHz under the same conditions as the SNR measurement)

## Clock/calendar

- CMOS custom circuitry with long-life battery

**WARNING** If the clock begins to lose accuracy, see your Apple-authorized dealer or service provider for a battery replacement. Do not attempt to replace the clock battery yourself.

## Keyboard

- Supports all Apple Desktop Bus (ADB) keyboards

## Mouse

- Supports all models of the ADB mouse

## Interfaces

- One ADB port supporting up to three ADB input devices (such as a trackball, keyboard, or mouse) daisy-chained through a synchronous serial bus
- The optional Apple External Video Connector kit provides one monitor-out port. By connecting a second monitor, an LCD panel, or a video presentation system to the port, you can simultaneously display on the attached device the images displayed on your computer's built-in monitor. (You cannot increase the size of your desktop by connecting a second monitor to this monitor-out port.) For a list of supported monitors, see "Video Output" earlier in this booklet.
- One internal expansion slot supporting 6.88-inch 15-watt Peripheral Component Interconnect (PCI) expansion cards. Install only expansion cards that come with Macintosh drivers and are compliant with the PCI 2.0 standard. NuBus™ cards cannot be used in this expansion slot.
- One internal expansion slot supporting communication cards (such as modem/fax, Ethernet)
- One internal expansion slot supporting video input cards using NTSC, PAL, and SECAM
- One internal expansion bay for the optional Apple TV/FM Radio System
- Two RS-232/RS-422 serial GeoPort-compatible ports
- One 3.5-mm sound output port for line-level devices such as powered loudspeakers
- One 3.5-mm headphone jack
- One 3.5-mm sound input port for stereo sound input. The sound input port supports the Apple PlainTalk Microphone. (You can also connect non-Apple microphones.) In addition, the sound input port supports a standard stereo (miniplug-to-RCA) cable adapter for connecting stereo equipment to your computer. It does not support the Apple Omni microphone (the round microphone shipped with some earlier models of Macintosh) or the attenuated RCA adapter provided with some models of Macintosh.
- One external standard SCSI port that supports up to six external SCSI devices

**IMPORTANT** Some older SCSI devices or SCSI devices not manufactured by Apple may require updated drivers. (A “driver” is special software that is installed in your System Folder.) Contact the device manufacturer for information on obtaining driver software.

### Additional features

- Built-in microphone
- Built-in stereo speakers
- Support for optional infrared remote control
- Front panel push-button controls for volume and picture
- Power on and off from keyboard and optional remote control (included with the optional Apple TV/FM Radio System)

### Size and weight

Weight	Height	Width	Depth
<b>Main unit</b>			
21.15 kg*	445 mm	383 mm	406 mm
47 lbs.*	17.5 in.	15.1 in.	16 in.
<hr/>			
<b>Mouse</b>			
0.11 kg	33 mm	61 mm	107 mm
4 oz.	1.3 in.	2.4 in.	4.2 in.

\*Weight varies depending on type of hard disk and any optional equipment.

### Environment

#### Operating temperature

- 10° C to 40° C (50° F to 104° F)

#### Storage temperature

- -40° C to 47° C (-40° F to 116.6° F)

#### Relative humidity

- 5 percent to 95 percent (noncondensing)

#### Altitude

- Works below 3048 m (10,000 ft.)



## Power

### AC line input

- Line voltage: 90–264 volts (V) alternating current (AC), RMS single phase, automatically configured
- Frequency: 47–63 Hz
- Power: 220 watts maximum continuous

### DC power

- Continuous output: 73 watts (60 W maximum during sleep mode)

Current type	Maximum current*
+5 V	10.7 A†
+5 V (trickle)	0.1 A
+3.3 V	5 A†
+12 V	1.5 A
–12 V	0.1 A

\*Total power output cannot exceed 98 W.

†Not more than 10.7 A total combined current on +5 V and +3.3 V outputs.

### CD-ROM drive

The following table shows typical power consumption for the internal CD-ROM drive.

Power consumption (typical)	
+5 V DC	350 milliamperes (mA)
+12 V DC	500 mA

## Power requirements for devices you can connect

### Apple Desktop Bus (ADB)

- Mouse draws up to 10 milliamperes (mA)
- Keyboard draws 25–80 mA (varies with keyboard model used)
- Maximum current available for all ADB devices and all serial devices: 500 mA

*Note:* The ADB port can support up to three daisy-chained ADB devices.

### Audio and telecommunications devices

The following table shows power allowances for external devices connected to input ports.

Device	Voltage	Current	Power
Microphone	+5 V	1 mA	5 mW
GeoPort telecom adapter & ADB devices	+5 V	500 mA	2.5 W
S-video input connector	+12 V	250 mA	3 W

### Expansion cards and devices

If you add an expansion card to your computer, make sure the component's power requirements don't exceed the maximum power allowances allocated to it by the computer.

Power allowances are presented in the following table.

Device	Voltage	Current	Power
PCI expansion card (15 watts)*	+3.3 V	2 A	6.6 Watts
	+5 V	3 A	15 Watts
	-12 V	500 mA	6 Watts
Communication expansion card†	+5 V	500 mA	2.5 Watts
	+12 V	100 mA	1.2 Watts
Video input expansion card‡	+5 V	200 mA	1 Watt
	+12 V	300 mA	3.6 Watts

\*The PCI expansion card should not consume more than 15 watts of power total.

†The communication card should not consume more than 2.5 watts of power total.

‡The video input card should not consume more than 4.6 watts of power total.





## Specifications for CD-ROM drive

Your computer is available with CD-ROM drives of different speeds. The following information applies generally to these drives.

### Disc diameter

- 120 mm (4.7 inches)
- 80 mm (3.2 inches)

### Data capacity


- 656 MB, Mode 1
- 748 MB, Mode 2

### Modes supported

- Audio CD
- CD-ROM: Modes 1 and 2
- CD-ROM XA: Mode 2, Forms 1 and 2
- CD-I: Mode 2, Forms 1 and 2
- Photo CD: Single-session and multisession
- Video CD

### Laser

- Type: Semiconductor GaAlAs laser
- Wavelength: 770 to 820 nanometers
- Output power: 0.2 to 0.6 milliwatts
- Beam divergence: 55°

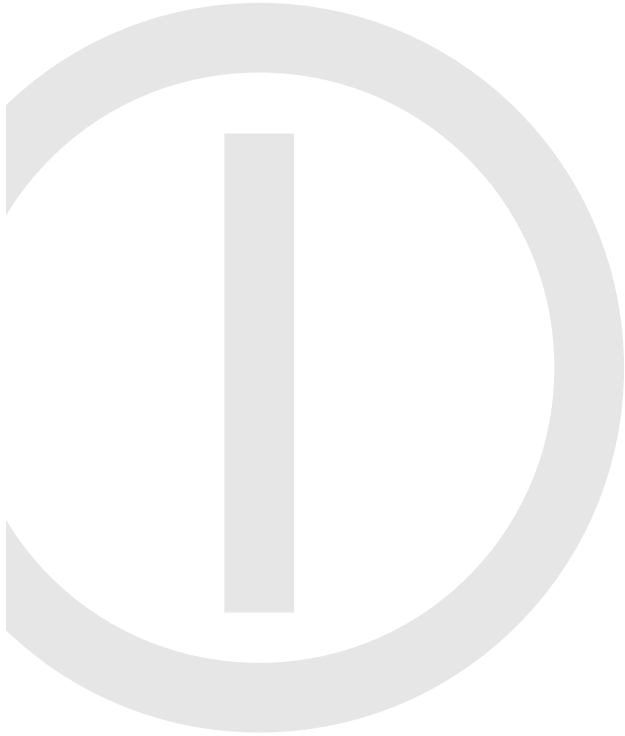

© 1997 Apple Computer, Inc. All rights reserved. Apple, the Apple logo, Apple SuperDrive, GeoPort, Macintosh, PlainTalk, and Power Macintosh are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. Apple Desktop Bus and AudioVision are trademarks of Apple Computer, Inc. NuBus is a trademark of Texas Instruments. SRS and the SRS logo are trademarks of SRS Labs, Inc. registered in the U.S. and other countries. Manufactured under license from SRS Labs, Inc. Purchase of this product does not convey the right to sell recordings made using the Sound Retrieval System. PowerPC is a trademark of International Business Machines Corporation, used under license therefrom.

034-0293-A  
Printed in U.S.A.

The background features several large, light gray, abstract geometric shapes. On the left, a large, thick-lined shape resembles a stylized letter 'E' or a house-like structure. To its right, there are various curved and angular lines and shapes, including a horizontal bar with rounded ends, a wavy line, and several thick, rounded, L-shaped or hook-like forms. These elements are layered and partially overlap each other, creating a complex, modern aesthetic.

# Technical Information

.....  
*Specifications for Power Macintosh 5400 series computers*